


TTS 36-A

ACTIVE HIGH POWER SUBWOOFER

DESCRIPTION

The TTS36-A is a high power, high output active subwoofer system that sets a new standard in the touring sound reinforcement. The new 18" neodymium design represents the result of many years dedicated in pioneering new solutions for the transducers technology. The integration of the 4000 Watt, 2 channels digital amplification and the advanced digital processing set a new standard for distortion, noise and thermal efficiency.

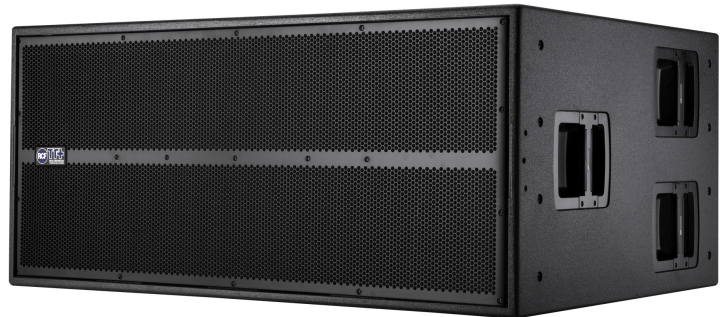

FEATURES

- 4000 watt (2 x 2000 Watt digital amplifiers)
- 2 x 18" high power neodymium woofers, 4.5" v. c.
- 96 KHz, 32 bit DSP processing
- Remote monitoring and control
- Time delay alignment
- Bass reflex design, Cardioid preset for groups
- Tour grade cabinet
- RDNet on board
- Maximum output per size on market

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response:	35 Hz ÷ 120 Hz
	Max SPL @ 1m:	143 dB
Transducers	Woofers:	2 x 18" neo, 4.5" v.c
Input/Output section	Input signal:	bal/unbal
	Input connectors:	XLR, RDNet Ethercon
	Output connectors:	XLR, RDNet Ethercon
	Input sensitivity:	-2 dBu/+10 dBu
Processor section	Hi-Pass Frequencies:	120 Hz
	Low-Pass Frequencies:	80 Hz
	Protections:	Thermal, Excurs., RMS
	Limiter:	Soft Limiter
	Controls:	DSP Controlled
	RDNet:	Yes
Power section	Total Power:	8000 W Peak, 4000 W RMS
	Low frequencies:	8000 W Peak, 4000 W RMS
	Cooling:	Convection/Forced
	Connections:	Powercon IN/OUT
Standard compliance	CE marking:	Yes
Physical specifications	Cabinet/Case Material:	Baltic birch plywood
	Hardware:	4 wheels, Steel bars x fork-lift
	Handles:	6 side
	Grille:	Steel
	Color:	Black
Size	Height:	525 mm / 20.67 inches
	Width:	1170 mm / 46.06 inches
	Depth:	850 mm / 33.46 inches
	Weight:	100 kg / 220.46 lbs
Shipping informations	Package Height:	1151 mm / 45.31 inches
	Package Width:	1194 mm / 47.01 inches
	Package Depth:	794 mm / 31.26 inches
	Package Weight:	154 kg / 339.51 lbs

PART NUMBER

- **13000272**

TTS 36-A

90-240V

EAN 8024530009090

